

GENERAL NOTES:


- 1. SEE SPECIFICATIONS FOR KEYING REQUIREMENTS.
- 2. PROVIDE AND INSTALL HOSPITAL DOOR STOP AT ALL NEW NON-OPERATED INTERIOR DOORS THROUGHOUT CLINIC.
- 3. SEE SPECIFICATIONS FOR HARDWARE SETS.
- 4. SEE DWG 401 FOR DOOR, AND FRAME DETAILS

ABBREVIATIONS / LEGEND:

- AL · ALUMINUM
- CH · COAT HOOK
- C · CLOSER
- DS · DOOR STOP
- EX · EXIT DEVICE
- ES · EMERGENCY STOP
- FB · FLUSH BOLT
- GL · GLAZING
- H · HINGE
- HM · HOLLOW METAL
- L · LOCKSET
- MP · MOP PLATE
- NRP · NON-REMOVABLE PIN
- SL · SEAL
- SD · SADDLE
- S · SILENCER
- WD · WOOD
- WS · WEATHERSTRIPPING

SECOND FLOOR DOOR SCHEDULE

DOOR NO	ROOM NAME	WIDTH	HEIGHT	THICKS.	DOOR		UNDERCUT	SADDLE	FRAME		RATING	HEAD	JAMB	HARDWARE SET	REMARKS	DOOR NO
					TYPE	MATERIAL			MATERIAL	TYPE						
200 B	CIRCULATION	3'-8"	7'-0"	1 3/4"	WD-2A	WD	NONE	-	HM	F-1A	-	A	A	1.1		200 B
200 C	CIRCULATION	3'-8"	7'-0"	1 3/4"	HM-1C	HM	NONE	-	HM	F-1C	3/4 HR	A	A	1.0		200 C
201	WAITING ROOM	3'-0"	7'-0"	1 3/4"	HM-3C	HM	NONE	-	HM	F-3	3/4 HR	A	A	1.0		201
201 A	CIRCULATION	3'-8"	7'-0"	1 3/4"	HM-3C	HM	NONE	-	HM	F-1C	3/4 HR	AC	AC	1.0		201 A
202	RECEPTION	3'-0"	7'-0"	1 3/4"	WD-2A	WD	NONE	-	HM	F-1A	-	A	A	1.1		202
203	NURSE OFFICE	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-1A	-	A	A	2.0		203
204	CLOSET	3'-0"	7'-0"	1 3/4"	WD-1C	WD	NONE	-	HM	F-1C	3/4 HR	A	A	3.0		204
205	EXAM ROOM	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-1A	-	A	A	4.0		205
206	EXAM ROOM	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-1A	-	A	A	4.0		206
207	EXAM ROOM	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-1A	-	A	A	4.0		207
208	EXAM ROOM	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-1A	-	A	A	4.0		208
209	EXAM ROOM	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-1A	-	A	A	4.0		209
210	EXAM ROOM	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-1A	-	A	A	4.0		210
211	EXAM ROOM	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-1A	-	A	A	4.0		211
212	EXAM ROOM	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-1A	-	A	A	4.0		212
213	EXAM ROOM	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-1A	-	A	A	4.0		213
214	EXAM ROOM	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-1A	-	A	A	4.0		214
215	OFFICE	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-1A	-	A	A	2.0		215
216	CLEAN UTILITY	3'-0"	7'-0"	1 3/4"	WD-2A	WD	NONE	-	HM	F-1A	-	A	A	5.0		216
217	TOILET ROOM	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-2	-	B	B	6.0	DOUBLE ACTING DOOR	217
218	CONSULTING	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-1A	-	A	A	4.0		218
219	SOILED UTILITY	3'-0"	7'-0"	1 3/4"	WD-2C	WD	NONE	-	HM	F-1C	3/4 HR	A	A	5.1		219
220	PATIENT TOILET ROOM	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-2	-	B	B	6.0	DOUBLE ACTING DOOR	220
221	STAFF TOILET ROOM	3'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-1A	-	A	A	7.0		221
222	CLOSET	0/2'-0"	7'-0"	1 3/4"	WD-1A	WD	NONE	-	HM	F-1A	-	A	A	8.0		222

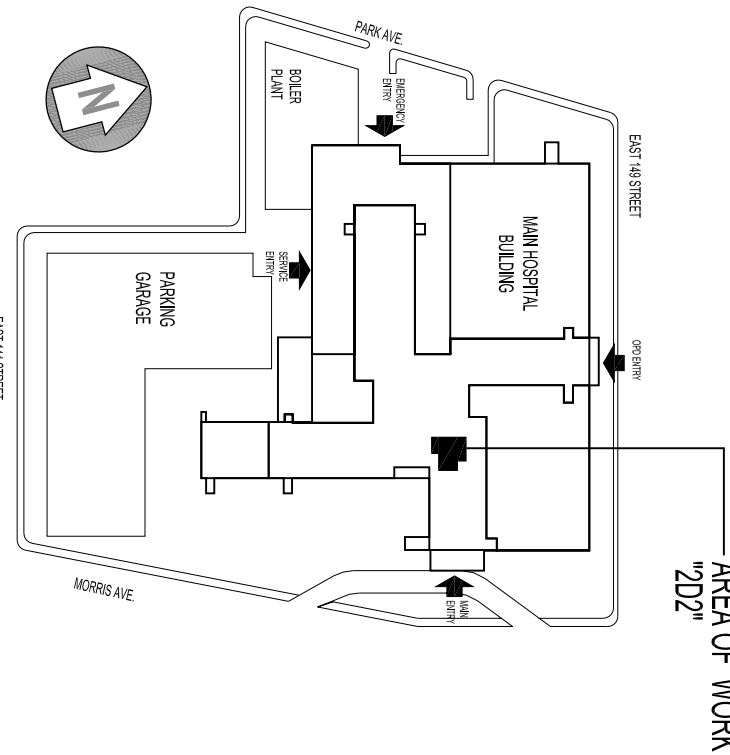

NEW YORK CITY
HEALTH AND
HOSPITALS
CORPORATION

LINCOLN MEDICAL AND
MENTAL HEALTH CENTER
234 East 149th Street, Bronx, New York 10451

M J C L
Architects, PLLC
1416 Avenue M, Brooklyn, NY 11230
Tel.: (718) 338-5390 Fax: (718) 538-8642

Lilker
Consulting Engineers, PC
1001 Avenue of the Americas, New York, NY 10018
Tel: 212.695.1000 Fax 212.695.1299 www.lilker.com

NEW CLINIC RENOVATION AT SECOND FLOOR
234 East 149 Street Bronx, NY 10451

DOOR SCHEDULE

SCALE : NONE	DRAWING # :
DRAWN BY : CAD	A-400.00
CHECKED BY : VC	
DATE : 09-06-2011	
DWG # : 21115.00	18 of 36