DOOR SCHEDULE

DOOR NUMBER	DOOR SIZE WIDTH	SIZE HEIGHT	SIZE THICKNESS	SIZE UNDER CUT	DOOR TYPE	DOOR MAT'L	DOOR GLAZING	DOOR FIRE RATING (HOURS)	FRAME TYPE	FRAME MAT'L	FRAME DETAILS HEAD	FRAME DETAILS JAMB	FRAME DETAILS SILL	HARDWARE GROUP	REMARKS
CELLAR															
C01	3'-0"	FULL HT	1 3/4"	1/2"	-	HM	-	-	01	HM	-	8/A-920	-	01	FIELD VERIFY FOR HEIGHT; SEE 3/A-802 FOR ELEV.
C02	3'-0"	FULL HT	1 3/4"	1/2"	F	HM	-	-	01	HM	1/A-920	3/A-920	-	01	FIELD VERIFY FOR HEIGHT
C03	3'-0"	FULL HT	1 3/4"	1/2"	F	HM	-	1 1/2	01	HM	2/A-920	4/A-920	-	01	FIELD VERIFY FOR HEIGHT
C04	3'-0"	FULL HT	1 3/4"	1/2"	F	HM	-	1	01	HM	1/A-920	3/A-920	-	02A	FIELD VERIFY FOR HEIGHT
FIRST FLOOR															
101	3'-0"	7' - 0"	1 3/4"	1/2"	F	HM	-	3/4	01	HM	1/A-920	3/A-920	-	02B	
102	3'-0"	7' - 0"	1 3/4"	1/2"	F	HM	-	3/4	01	HM	1/A-920	3/A-920	-	02A	
103	3'-0"	7' - 0"	1 3/4"	1/2"	F	HM	-	1	01	HM	1/A-920	3/A-920	-	02	
104	3'-0"	7' - 0"	1 3/4"	1/2"	F	HM	-	-	01	HM	1/A-920	3/A-920	-	03	
106	3'-0"	7' - 0"	1 3/4"	1/2"	F	HM	-	3/4	01	HM	1/A-920	3/A-920	-	01A	
106A	MATCH EXISTING	MATCH EXISTING	1 3/4"	1/2"	F	HM	-	-	EXISTING	EXISTING	EXISTING	EXISTING	-	04	EXISTING FRAME TO REMAIN; FIELD VERIFY FOR DOOR HEIGHT & WIDTH; INSULATED CORE W/MIN R-VALUE OF1.5; PHASE 2
108	3'-0"	7' - 0"	1 3/4"	1/2"	F	HM	-	-	01	HM	1/A-920	3/A-920	-	01A	
109	3'-0"	7' - 0"	1 3/4"	1"	F	HM	-	-	01	HM	1/A-920	3/A-920	5/A-920	05	
110	3'-0"	7' - 0"	1 3/4"	1"	F	HM	-	-	01	HM	1/A-920	3/A-920	5/A-920	05	
113	(2) 3'-0"	7' - 0"	1 3/4"	1/2"	F	HM	-	3/4	02	HM	1/A-920	3/A-920	-	06	
113A	(2) 3'-0"	7' - 0"	1 3/4"	1/2"	F	HM	-	3/4	02	HM	1/A-920	3/A-920	-	07	
113B	3'-0"	7' - 0"	-	-	FG	-	-	-	-	-	3A-940	1-940	3-940	08	STOREFRONT SYSTEM; SEE SECTION 084313
113C	3'-0"	7' - 0"	-	-	FG	-	-	-	-	-	3A-940	1-940	3-940	08	STOREFRONT SYSTEM; SEE SECTION 084313
113D	3'-0"	7' - 0"	-	-	FG	-	-	-	-	-	3A-940	1-940	3-940	08	STOREFRONT SYSTEM; SEE SECTION 084313
113E	3'-0"	7' - 0"	-	-	FG	-	-	-	-	-	3A-940	1-940	3-940	08	STOREFRONT SYSTEM; SEE SECTION 084313; PHASE 2
SECOND FLOOR															
203	3'-0"	7' - 0"	1 3/4"	1"	F	HM	-	3/4	01	HM	1/A-920	3/A-920	-	01A	
204	3'-0"	7' - 0"	1 3/4"	1/2"	F	HM	-	1	01	HM	1/A-920	3/A-920	-	02A	
205	3'-0"	7' - 0"	1 3/4"	1/2"	F	HM	-	-	01	HM	1/A-920	3/A-920	-	09	

DOOR TYPES



FRAME TYPES

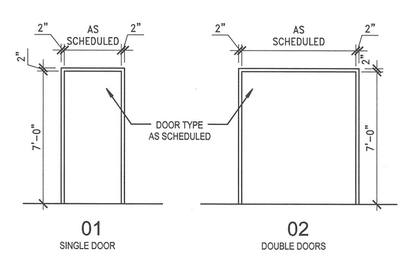

HARDWARE NOTES

1. ALL LOCKSETS, LATCHSETS, PRIVACY LOCKS, ETC. TO BE SCHLAGE L SERIES #02
2. ALL HINGES TO BE PRIMED FOR PAINTING.
3. FOR ALL FLUSH BOLTS, GENERAL CONTRACTOR TO VERIFY LENGTH TO EXTENSION ROD BASED ON HEIGHT OF DOOR.
4. PROVIDE RISERS AS REQUIRED AT ALL FLOOR MOUNTED DOOR STOPS.
5. KEYING REQUIREMENTS:
   A. ALL LOCKED DOORS TO BE KEYED SEPARATELY
   B. ALL LOCKED DOORS TO BE MASTER KEYED
   C. FURNISH TWO (2) KEYS FOR EVERY LOCK
6. ALL SINGLE DOORS TO RECIEVE (3) SILENCERS.
7. ALL DOOR FRAMES TO BE WELDED.
8. FINISH OF ALL HARDWARE TO BE SATIN STAINLESS STEEL (US26D).
9. ALL DOORS 7'-0" TO RECEIVE (3) BUTT HINGES. ALL DOORS OVER 7'-0" TO RECEIVE(4) BUTT HINGES.
10. FOR SILL AND FRAME DETAILS REFER TO SHEET A-921.
11. DOOR CLOSER REQUIREMENTS:
    A. POWDER COAT FINISH
    B. REGULAR MOUNT W/ PARALLEL ARM
    C. NO HOLD OPEN OPTION
    D. METAL COVER
    E. CUSH-N-STOP (TYP)
    F. 180 DEG OPENING FOR HARDWARE GROUP 5, 9 AND 11 ONLY
12. IT SHALL BE THE SPECIFIC DUTY AND RESPONSIBILITY OF THE FINISH HARDWARE SUPPLIER TO EXAMINE DRAWINGS AND SCHEDULES, AND FURNISH PROPER HARDWARE FOR ALL NEW AND/OR MODIFIED OPENINGS AS REQUIRED FOR A COMPLETE INSTALLATION. CONTRACTOR SHALL SUBMIT A HARDWARE SCHEDULE TO ARCHITECT FOR REVIEW AND APPROVAL OF TYPES AND STANDARDS OF QUALITY PROIR TO ORDERING.
13. PANIC HARDWARE EXIT DEVICE REQUIREMENTS:
    A. CONCEALED VERTICAL ROD SYSTEM
    B. LEVER:
       1. PASSAGE FUNCTION FOR HARDWARE GROUP 6 ONLY
       2. EXIT ONLY FUNCTION FOR HARDWARE GROUP 7 ONLY
       3. CLASSROOM FUNCTION FOR HARDWARE GROUP 7A ONLY
    C. LEVER TO MATCH SCHLAGE L SERIES
    D. CYLINDER DOGGING

HARDWARE SCHEDULE & SPECIFICATION

HARDWARE GROUP	ITEM	MANUFACTURER	MODEL NO.	FINISH
GROUP 01	BUTT HINGE	IVES	EBB1 4.5 X 4.5	600
	MASTERKEYED	RE-CORE CYLINDER TO MATCH KEY SYSTEM		-
	LOCKSET - STOREROOM	SCHLAGE	L9080BDC 02A	626
	DOOR CLOSER - SURFACE MTD	LCN	SERIES 1461 CUSH	689
	DOOR SILENCER	IVES	SR64	GRY
GROUP 01A	BUTT HINGE	IVES	EBB1 4.5 X 4.5	600
	MASTERKEYED	RE-CORE CYLINDER TO MATCH KEY SYSTEM		-
	LOCKSET - STOREROOM	SCHLAGE	L9080BDC 02A	626
	DOOR CLOSER - SURFACE MTD	LCN	SERIES 1461 (REG ARM)	689
	DOOR STOP - WALL	IVES	WS407CCV	630
	DOOR SILENCER	IVES	SR64	GRY
GROUP 02	BUTT HINGE	IVES	EBB1 4.5 X 4.5	600
	FIRE EXIT HARDWARE	VON DUPRIN	99L-F 996L X 02	626
	MASTERKEYED	CYLINDER TO SUIT (EXIT DEVICE)		-
	MASTERKEYED	RE-CORE CYLINDER TO MATCH KEY SYSTEM		-
	DOOR CLOSER - SURFACE MTD	LCN	SERIES 1461 CUSH	689
	DOOR SILENCER	IVES	SR64	GRY
GROUP 02A	BUTT HINGE	IVES	EBB1 4.5 X 4.5	600
	FIRE EXIT HARDWARE	VON DUPRIN	99L-F 996L X 02	626
	MASTERKEYED	CYLINDER TO SUIT (EXIT DEVICE)		-
	MASTERKEYED	RE-CORE CYLINDER TO MATCH KEY SYSTEM		-
	DOOR CLOSER - SURFACE MTD	LCN	SERIES 1461 (REG ARM)	689
	DOOR STOP - WALL	IVES	WS407CCV	630
	DOOR SILENCER	IVES	SR64	GRY
GROUP 02B	BUTT HINGE	IVES	EBB1 4.5 X 4.5	600
	FIRE EXIT HARDWARE	VON DUPRIN	99L-F 996L X 02	626
	MASTERKEYED	CYLINDER TO SUIT (EXIT DEVICE)		-
	MASTERKEYED	RE-CORE CYLINDER TO MATCH KEY SYSTEM		-
	DOOR CLOSER - SURFACE MTD	LCN	SERIES 1461 (PARALLEL ARM)	689
	DOOR STOP - WALL	IVES	WS407CCV	630
	DOOR SILENCER	IVES	SR64	GRY
GROUP 03	BUTT HINGE	IVES	EBB1 4.5 X 4.5	600
	MASTERKEYED	RE-CORE CYLINDER TO MATCH KEY SYSTEM		-
	LOCKSET - STOREROOM	SCHLAGE	L9080BDC 02A	626
	DOOR CLOSER - SURFACE MTD	LCN	SERIES 1461 (PARALLEL ARM)	689
	DOOR STOP - WALL	IVES	WS407CCV	630
	DOOR SILENCER	IVES	SR64	GRY
GROUP 04	BUTT HINGE	IVES	EBB1 4.5 X 4.5	600
	MASTERKEYED	RE-CORE CYLINDER TO MATCH KEY SYSTEM		-
	LOCKSET - STOREROOM	SCHLAGE	L9080BDC 02A	626
	DOOR CLOSER - SURFACE MTD	LCN	SERIES 1461 (REG ARM)	689
	DOOR STOP - WALL	IVES	WS407CCV	630
	SEALS	ZERO INTERNATIONAL	188S	BLK
	DOOR SWEEP	ZERO INTERNATIONAL	328AA	AL
	THRESHOLD	-	SEE DETAIL	AL
GROUP 05	BUTT HINGE	IVES	EBB1 4.5 X 4.5	600
	MASTERKEYED	RE-CORE CYLINDER TO MATCH KEY SYSTEM		-
	LOCKSET - PASSAGE	SCHLAGE	L9010 02A	626
	DOOR CLOSER - SURFACE MTD	LCN	SERIES 1461 (REG ARM)	689
	DOOR STOP - WALL	IVES	WS407CCV	630
	SEALS	ZERO INTERNATIONAL	188S	BLK
GROUP 06	BUTT HINGE	IVES	EBB1 4.5 X 4.5	600
	PANIC HARDWARE	VON DUPRIN	CD9927L-LBR 996L X 02	626
	MASTERKEYED	CYLINDER TO SUIT (EXIT DEVICE)		-
	MASTERKEYED	RE-CORE CYLINDER TO MATCH KEY SYSTEM		-
	DOOR CLOSER - SURFACE MTD	LCN	SERIES 1461 CUSH	689
	DOOR SILENCER	IVES	SR64	GRY
GROUP 07	BUTT HINGE	IVES	EBB1 4.5 X 4.5	600
	CONSTANT LATCHING BOLTS	IVES	FB51P	630
	DUST PROOF STRIKE	IVES	DP2	626
	LOCKSET - STOREROOM	SCHLAGE	L9080BDC 02A	626
	LATCHSET - FULL DUMMY TRIM	SCHLAGE	L0172 02A	626
	COORDINATOR	IVES	COR X FL X MB	628
	DOOR CLOSER - SURFACE MTD	LCN	SERIES 1461 (PARALLEL ARM)	689
	MAGNETIC HOLD OPEN	LCN	SEM 7840	AL
	DOOR SILENCER	IVES	SR64	GRY
GROUP 08	PIVOT SET	IVES	7226F	630
	PIVOT	IVES	7226F INT	630
	PANIC HARDWARE	VON DUPRIN	CD33A-L X 02	626
	MASTERKEYED	CYLINDER TO SUIT (EXIT DEVICE)		-
	MASTERKEYED	RE-CORE CYLINDER TO MATCH KEY SYSTEM		-
	DOOR CLOSER - SURFACE MTD	LCN	4040XP SCUSH	689
	SEALS	ZERO INTERNATIONAL	188S	BLK
	DOOR SWEEP	ZERO INTERNATIONAL	328AA	AL
	THRESHOLD	-	SEE DETAIL	AL
GROUP 09	BUTT HINGE	IVES	EBB1 4.5 X 4.5	600
	MASTERKEYED	RE-CORE CYLINDER TO MATCH KEY SYSTEM		-
	LOCKSET - OFFICE	SCHLAGE	L9050 BDC 02A	626
	DOOR CLOSER - SURFACE MTD	LCN	SERIES 1461 (REG ARM)	689
	DOOR STOP - WALL	IVES	WS407CCV	630
	DOOR SILENCER	IVES	SR64	GRY

Project
BROOKLYN PHILHARMONIC MUSIC CENTER
299 DeGraw Street, Brooklyn, NY 11231

Prepared for
Brooklyn Philharmonic
55 Washington Street, Suite 656
Brooklyn, NY 11201

Contract No: 79.07250.09

HOK
1065 Avenue of the Americas
New York, NY 10018 USA
t +1 212 741 1200 f +1 212 633 1163

All reproduction & intellectual property rights reserved © 2012

In Association with

NEW YORK CITY DEPARTMENT OF DESIGN + CONSTRUCTION

NYC Department of Design & Construction
30-30 Thompson Avenue, #5-076
Long Island City, NY 11101

Old Structures
Structural Engineers
111 Broadway, 14th Floor
New York, NY 10006

M-E Engineers
MEP Engineers
29 West 38th Street, 5th Floor
New York, NY 10018

Syska Hennessy Group
Lighting Consultant
11 West 42 Street
New York, NY 10036

Key Plan

BLOCK: 414
LOT: 61

Professional Seals

It is a violation of the law of the State of New York for any person, unless acting under the direction of a licensed architect, to alter any item on these drawings.

No.	Issue Description	MM-DD-YYYY
01	ISSUED FOR FILING	06-14-2012
02	ISSUED FOR BID	07-20-2012

No.	Revision Description	MM-DD-YYYY

B-Scan

Drawn by SL Reviewed by SW
Project No 79.07250.09
Date June 1, 2011
CAPIS ID PV467BPHL

Sheet Title

DOOR & HARDWARE SCHEDULE

Sheet Number

A-920.00

Original drawing is 42 x 30 Do not scale contents of this drawing