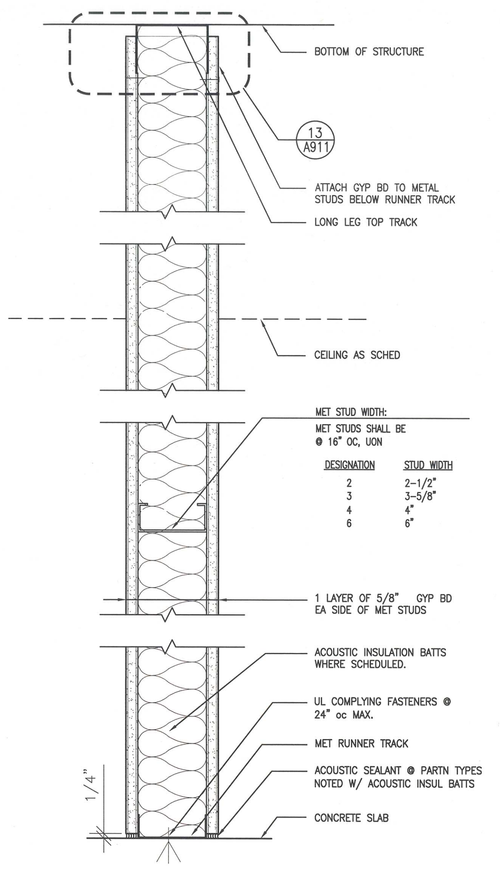

TYPE A: FULL HT PARTN, NON RATED

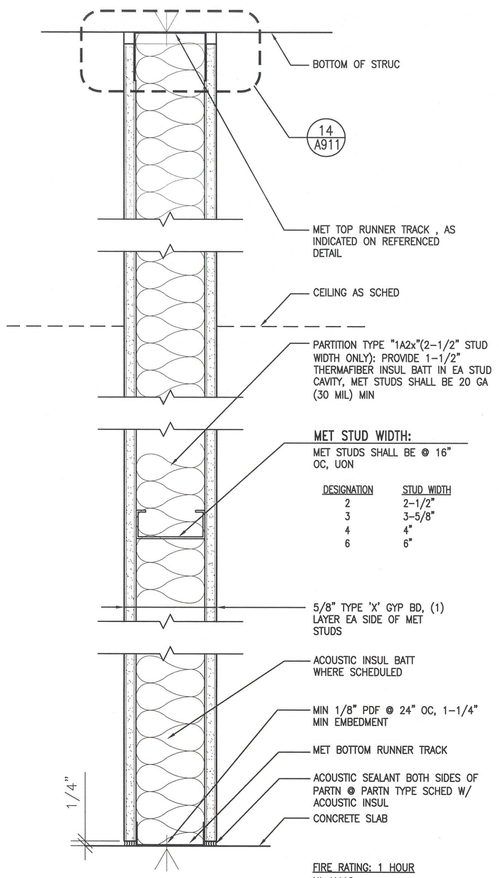

TYPE 1A: FULL HT PARTN, 1 HR RATED

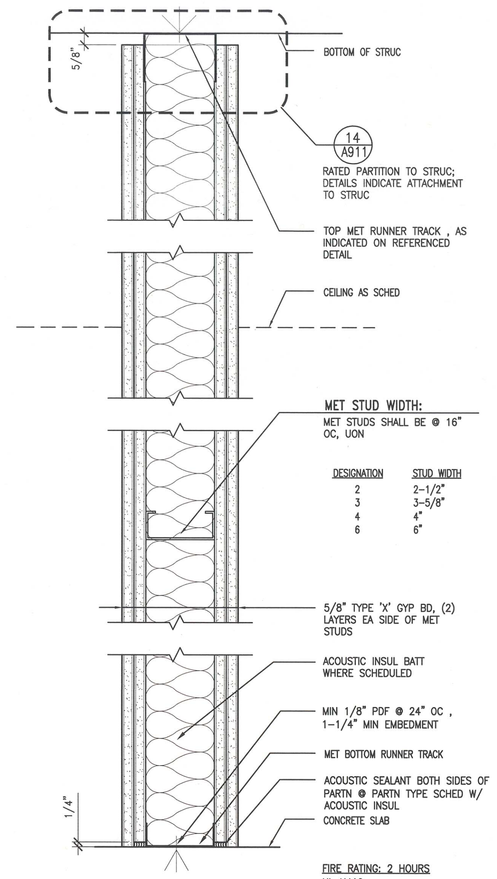

TYPE 2A: FULL HT PARTN, 2 HR RATED

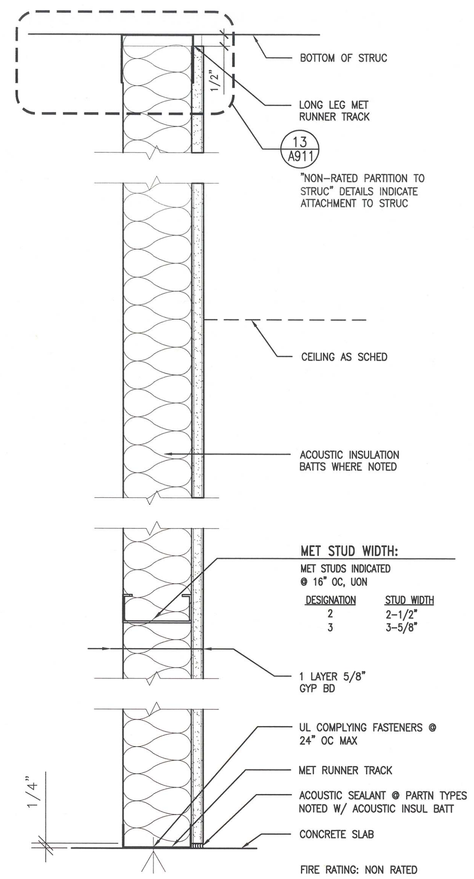

TYPE C: FULL HT CHASEWALL

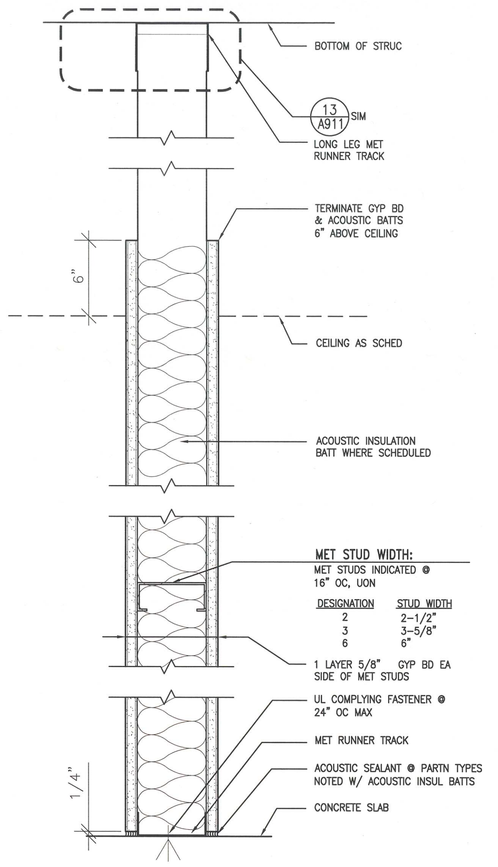

TYPE D: PARTIAL HT PARTN

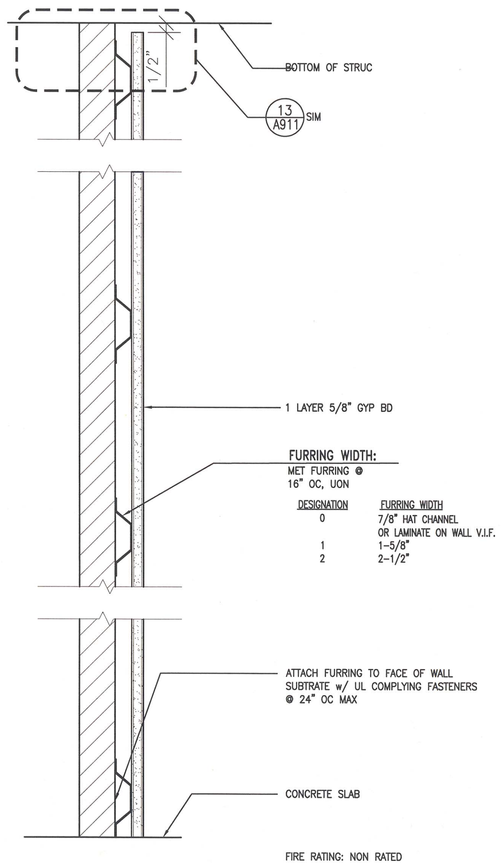

TYPE H: FURRING ON SUBSTRATE

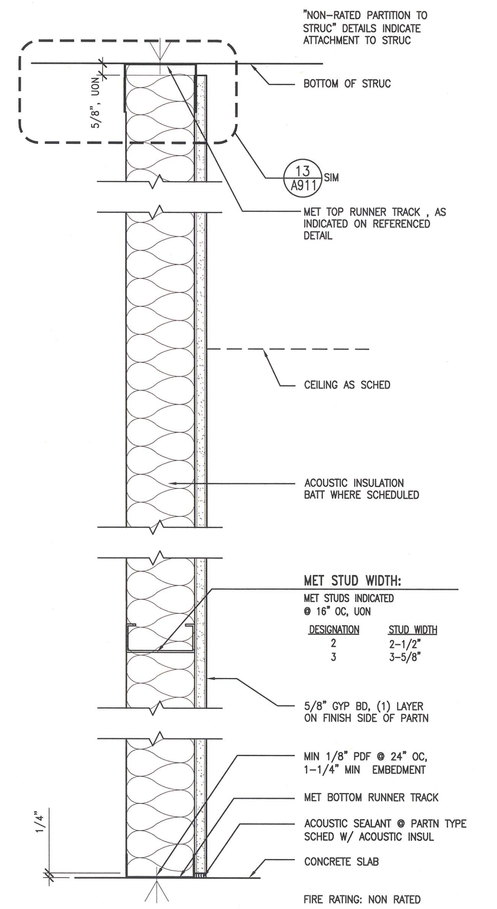

TYPE G: FULL HT FURRING

A910-1010G-0.DWG

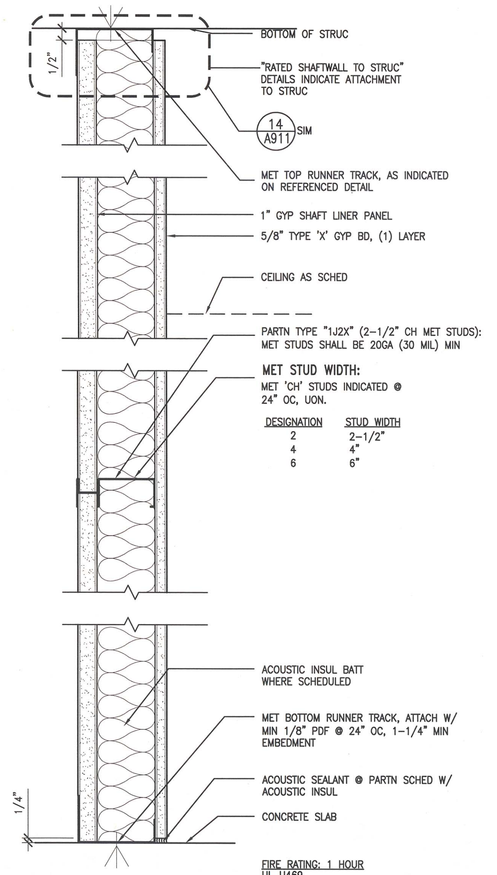

TYPE 1J: SHAFTWALL, 1 HR RATED

A910-1010J-1.DWG

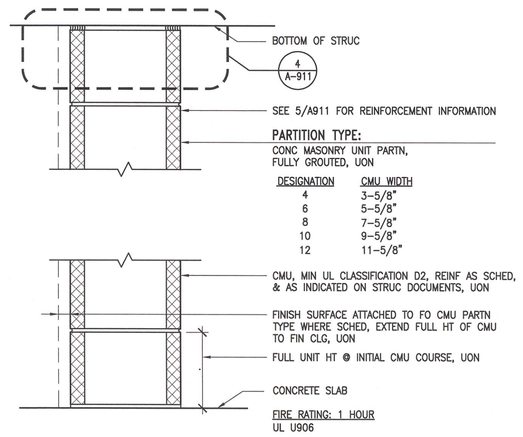

TYPE 1M: CMU PARTN, 1 HR RATED

NTS

A910-1010M-0.DWG

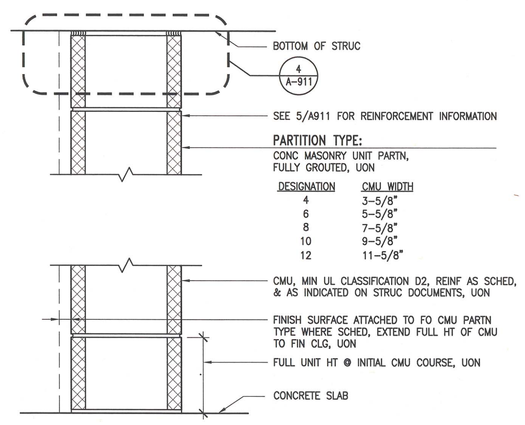

TYPE M: CMU PARTN, NON RATED

NTS

PARTITION TYPE GENERAL NOTES

A910-1000A.DWG

PARTITION TYPES:

THE PARTITION TYPE TAG, ILLUSTRATED BELOW, INDICATES THE FULL EXTENT OF EACH PARTITION IDENTIFED BY THE TAG ON THE FLOOR PLANS. EACH PARTITION TYPE SHALL COMPLY WITH ALL REQUIREMENTS INDICATED BY GENERAL NOTES AND DETAILS IN THE PROJECT DOCUMENTS.
REFER TO PARTITION TYPE DETAILS INDICATED BY THE "PARTITION TYPE" CHARACTER ON THE TAG, FOR EXAMPLE: DETAIL "TYPE A".
REFER TO THE FIRE RATING LEGEND FOR THE RATING CLASSIFICATION INDICATED BY THE "FIRE RATING INDICATION" ON THE TAG, FOR EXAMPLE: "1" = 60 MIN FIRE RATED PARTITION ASSEMBLY.
REFER TO METAL STUD SIZE OR CMU NOM WIDTH AS INDICATED BY THE "METAL STUD/CMU WIDTH" CHARACTER ON THE TAG, AS SHOWN ON PARTITION TYPE DETAILS, FOR EXAMPLE: "3" = 3-5/8" METAL STUDS.
REFER TO THE "PARTITION TYPE MODIFIER" NOTES BELOW, WHICH APPLY TO EACH PARTITION WHERE MODIFIER CHARACTER(S) ARE SHOWN ON THE TAG.
GENERAL NOTES – SEISMIC ZONES 1,5:
ALL METAL STUD PARTITION TYPES SHALL COMPLY WITH PARTITION TYPE GENERAL NOTES, AND THE "METAL STUD SPAN SHCEDULE" INDICATING MIN METAL STUD WIDTH, SPACING, GAUGE, AND LIMITING VERT SPAN.
ALL CMU PARTITION TYPES SHALL COMPLY WITH PARTITION TYPE GENERAL NOTES, AND "CMU LINTEL SCHEDULE" FOR MIN CMU REINFORCING AND LIMITING LINTEL SPANS.

PARTITION TYPE TAG:



PARTITION TYPE MODIFIERS:

THE FOLLOWING NOTES APPLY TO THE FULL EXTENT OF EACH PARTITION, WHERE "PARTITION TYPE MODIFIER" CHARACTER(S) ARE SHOWN ON THE TAG:
A. PROVIDE ACOUSTIC INSUL BATT, FRICTION FIT, FULL DEPTH & HEIGHT OF EACH MET STUD CAVITY
B. PROVIDE MOLD RESISTANT GYP BD (TYPE-X AT SCHEDULED FIRE RATED PARTITIONS)
C. PROVIDE (1) LAYER OF 5/8" CEMENT BD ON EACH SIDE OF SCHEDULED PARTITION
R. PROVIDE 5/8" CEMENT BD ON EACH SIDE OF MTL STUD IN LIEU OF 5/8" GYP BD

FIRE RATING LEGEND:

THE COMPLETE ASSEMBLY OF EACH PARTITION WITH A FIRE RATING INDICATION SYMBOL SHOWN ON THE TAG, SHALL COMPLY WITH ALL REQUIREMENTS OF THE CORRESPONDING RATING CLASSIFICATION:

SYMBOL	RATING CLASSIFICATION
<OMITTED>	NON-RATED PARTITION, UON
1	60 MIN FIRE RATED PARTITION
1S	60 MIN FIRE RATED & SMOKE BARRIER PARTITION
2	120 MIN FIRE RATED PARTITION

Project
BROOKLYN PHILHARMONIC MUSIC CENTER
299 DeGraw Street, Brooklyn, NY 11231

Prepared for
Brooklyn Philharmonic
55 Washington Street, Suite 656
Brooklyn, NY 11201

Contract No: 79.07250.09

HOK
1065 Avenue of the Americas
New York, NY 10018 USA
t +1 212 741 1200 f +1 212 633 1163

All reproduction & intellectual property rights reserved © 2012

In Association with

NEW YORK CITY DEPARTMENT OF DESIGN + CONSTRUCTION
NYC Department of Design & Construction
30-30 Thompson Avenue, #5-076
Long Island City, NY 11101

Old Structures
Structural Engineers
111 Broadway, 14th Floor
New York, NY 10006

M-E Engineers
MEP Engineers
29 West 38th Street, 5th Floor
New York, NY 10018

Syska Hennessy Group
Lighting Consultant
11 West 42 Street
New York, NY 10036

Key Plan



BLOCK: 414
LOT: 61

Professional Seals



It is a violation of the law of the State of New York for any person, unless acting under the direction of a licensed architect, to alter any item on these drawings.

No.	Issue Description	MM-DD-YYYY
01	ISSUED FOR FILING	05-14-2012
02	ISSUED FOR BID	07-20-2012

No.	Revision Description	MM-DD-YYYY

B-Scan

Drawn by SL Reviewed by SW
Project No 79.07250.09
Date June 1, 2011
CAPIS ID PV467BPHL

Sheet Title

PARTITION TYPES

Sheet Number

A-910.00

Original drawing is 42 x 30. Do not scale contents of this drawing